



Configuring your service for Aussie Broadband FTTN/B nbn™

NOTE – This guide is for the Netcomm NF10W, but the settings will be applicable to all routers/service types.

1. Open a web browser.
2. Enter **192.168.20.1** into the address bar.
3. You will be prompted for a username and password. If your router has been preconfigured by Aussie Broadband, the username will be 'admin' and the password will be in your Aussie Broadband welcome package. If the router has been factory-reset the username and password will both be 'admin'.
4. Select the option 'basic setup'
5. Under basic setup select 'VDSL'

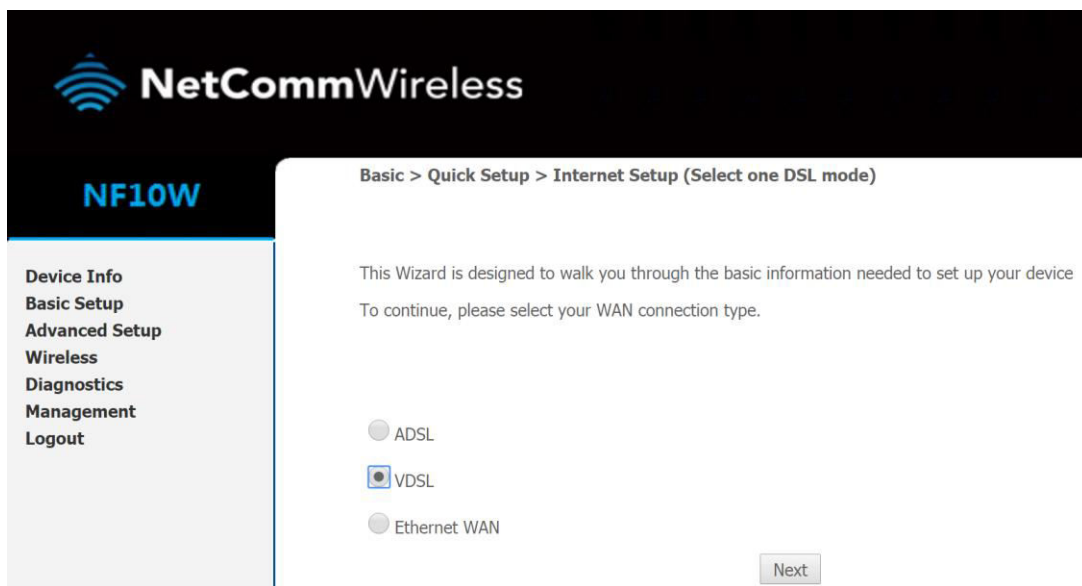

6. Select 'IP over Ethernet (IPoE)'.

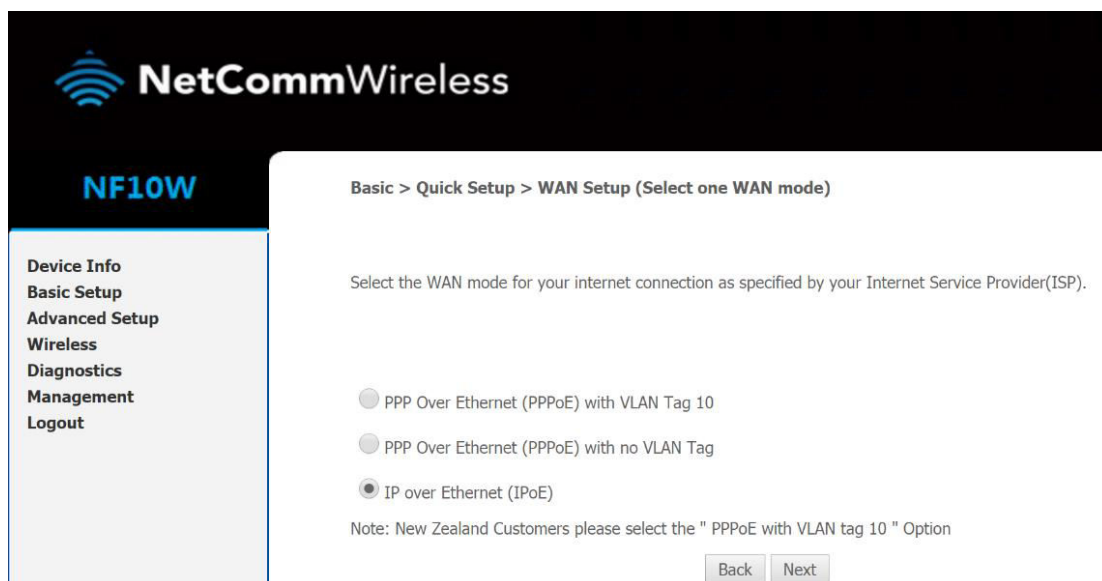

7. Select the option 'Obtain an IP address automatically'.

The screenshot shows the NetComm Wireless NF10W web interface. The breadcrumb trail is **Basic > Quick Setup > VDSL only > IPoE Information**. The page title is **IPoE Information**. The main content area contains the following text: "You can configure your IP over Ethernet(IPoE) settings as supplied by your Internet Service Provider(ISP). if your ISP supplied a static IP address, you can enter the details here. Otherwise,select"Obtain an IP address automatically". Below this text are two radio button options: "Obtain an IP address automatically" (which is selected) and "Use the following Static IP address". At the bottom right of the main content area are two buttons: "Back" and "Next". On the left side, there is a navigation menu with the following items: "Device Info", "Basic Setup", "Advanced Setup", "Wireless", "Diagnostics", "Management", and "Logout".

8. Click "Apply and Save"

The screenshot shows the NetComm Wireless NF10W web interface. The breadcrumb trail is **WAN Basic Setup - Summary**. The page title is **WAN Basic Setup - Summary**. The main content area contains the following text: "Make sure that the settings below match the settings provided by your ISP." Below this text is a table with the following settings:

Connection Type:	IPoE
NAT:	Enabled
Full Cone NAT:	Disabled
Firewall:	Enabled
IGMP Multicast:	Disabled
Quality Of Service:	Enabled

Below the table, the text reads: "Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications." At the bottom right of the main content area are two buttons: "Back" and "Apply/Save". On the left side, there is a navigation menu with the following items: "Device Info", "Basic Setup", "Advanced Setup", "Wireless", "Diagnostics", "Management", and "Logout".

Congratulations, you should now be able to access the internet.